


HDMI Active Optical Cable Instructions




Active Optical Cable is directional. Please make sure printed mark on connectors (Source/Display)

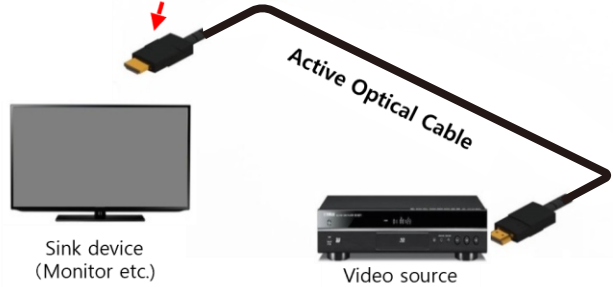

- * This product doesn't work if it is connected reversely
- * The actual shape of connector may be different from the picture



Tips for Installing

1. Do not apply strong force and/or shock to this product to prevent optical fiber damage during storage, transportation, and installation.
2. Avoid torsion of cable. In case of wiring, pull out cable with rotating cable coil as shown in below picture.

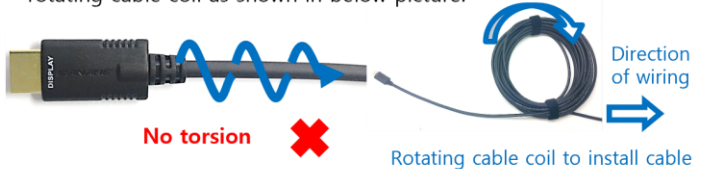


Minimum bending diameter
During installation: 6mm
After installation: 15mm

3. Keep minimum bending diameter to prevent fiber break and/or signal degradation.
4. In the case of connector mating and disconnecting, please hold connector body, not holding cable, to avoid malfunction.

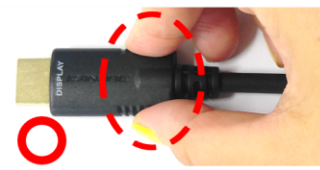

OK: Hold connector body

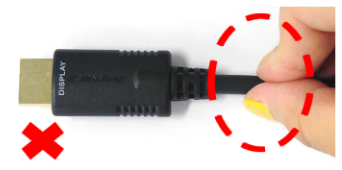

NG: Holding cable should be avoided

5. Take care of dust on electrical contacts. Put dust cap on electrical contacts when the cable is disconnected.



6. Canare will not provide proper support for any defects or damage resulting from accident, misuse, unauthorized modifications, unusual physical or electrical stress, service other than by the manufacturer, or abnormal conditions by the consumer (cable damage, case breakage, etc.)

7. Treatment of surplus cable length should be making coil with diameter more than twenty times of cable thickness. And fix the coil without stress on connector.



Coil diameter

[Precautions]

- * Read instructions carefully before usage of the product and other instruments.
- * Do not apply strong force and/or shock on the product
- * Use new cable if damage on cable or connector is found
- * Do not handle the product with wet hand
- * Do not use and storage the product in wet conditions
- * Do not place anything on the connector or cable