





Unbundled cable reels are also available.



42%\* lighter than existing models



Fiberglass flanges  
Excellent durability




Fiberglass flanges  
Anti-deform



Special rubber  
Rust-proof




Various cable type options



Selections of auxiliary spool or latching door

- Reduced weights approx 42% less comparing to existing models.
- Fiberglass flanges for excellent durability.
- Selections of auxiliary spool or latching door
- RM Series: Auxiliary spool for storing and safety transporting cables.
- MFK Series: Latching door allows you to store cable inside drum to prevent damage.
- Equipped with locking brake screw.

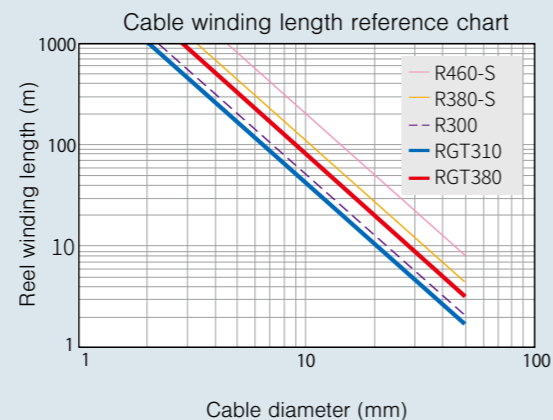

Model	Auxiliary spool	Latching Door	Weight (kg)	Dimension	Flange Dim.	Reel Width	Core Dim.
RGT310.RM	OK	—	1.8	310(W)×367(H)×230(D)			
RGT310.MFK	—	OK	1.4	310(W)×367(H)×230(D)	310	132	170
RGT380.RM	OK	—	4.8	380(W)×491(H)×291(D)			
RGT380.MFK	—	OK	4.3	380(W)×491(H)×291(D)	380	182	236

Please contact us for more detail.



**Caution!**

Do not use in water, high humidity, steam, dusty areas or oil smoky areas. It will cause a fire, an electric shock, and a malfunction of the equipment.

• Product specifications and external appearance are subject to change without notice due to upgrades

The colors of the pictures on this leaflet might seem different from the original because of the printing quality.

**USA**  
Canare Corporation of America  
sales@canare.com

**South Korea**  
Canare Corporation of Korea  
canare@canare.co.kr

**China**  
Canare Electric Corporation of Tianjin  
sales@canare.com.cn

**Taiwan**  
Canare Corporation of Taiwan  
sales@canare.com.tw

**Singapore**  
Canare Singapore Private Ltd.  
sales@canare.com.sg

**India**  
Canare Electric India Private Ltd.  
sales@canare.in

**Germany**  
Canare Europe GmbH  
office@canare.eu


**UAE**  
Canare Middle East FZCO  
info@canare.co.ae

**Japan**  
Japan Headquarters  
overseas@canare.co.jp

Canare exclusively collaborates with Schill™, the number one cable reel manufacturer.




Lightweight mobile cable reel system  
**RGT310.RM Series**  
**RGT380.RM Series**



42%\* lighter than existing models



Fiberglass flanges  
Excellent durability



Fiberglass flanges  
Anti-deform



Special rubber  
Rust-proof



Various cable type options

\* Compared to unbundled cable reels

## BNC Cables

RGT310.RM Series



### ■ BNC Cable Bundled CRG1M50-DH5CFW

Jacket color: **BLK** **RED** **GRN** **BLU**

Length	Weight	Cable	Connector
50m	5.9kg	L-5CFW	BCP-H51F

RGT380.RM Series



### ■ BNC Cable Bundled CRG8M100-DH5CFW

Jacket color: **BLK** **RED** **GRN** **BLU**

Length	Weight	Cable	Connector
100m	10.0kg	L-5CFW	BCP-H51F

## HFO Camera Cables

RGT380.RM Series



### ■ HFO OC Cable Bundled CRG8M100-OC9T

Jacket color: **BLK** **DeepRED** **DeepGRN**

Length	Weight	Cable	Connector
100m	15.4kg	LF-2SM9T	OCFA OCMA

RGT380.RM Series



### ■ HFO OC Cable Bundled CRG8M100-OC7T

Jacket color: **BLK**

Length	Weight	Cable	Connector
100m	10.9kg	LF-2SM7T	OCF7T OCM7T

RGT380.RM Series



### ■ HFO FC Cable Bundled CRG8M100-FC9T

Jacket color: **BLK** **DeepRED** **DeepGRN**

Length	Weight	Cable	Connector
100m	15.2kg	LF-2SM9T	FCFA FCMA

RGT380.RM Series



### ■ HFO FC Cable Bundled CRG8M100-FC7T

Jacket color: **BLK**

Length	Weight	Cable	Connector
100m	10.8kg	LF-2SM7T	FCF7A FCM7A

## Cat6 (Flexible STP)

RGT380.RM Series



### ■ Cat6 Cable Bundled CRG8M100-ETC6T

Jacket color: **BLK**

Length	Weight	Cable	Connector
100m	13.7kg	RJC6-4P-SFM	RJ45

RGT380.RM Series



### ■ Cat6 Cable Bundled CRG8M100-ETC6N

Jacket color: **BLK**

Length	Weight	Cable	Connector
100m	13.7kg	RJC6-4P-SFM	NE8MX6-BT

## XLR Cables

RGT310.RM Series



### ■ XLR3 Cable Bundled CRG1M100-ECB

Jacket color: **BLK** **BRN** **RED** **ORN** **YEL** **GRN** **BLU** **PPL** **GRY** **WYT**

Length	Weight	Cable	Connector
100m	6.5kg	L-4E6S	NC3FXX-B NC3MXX-B



#### Cable clip

A cable clip is attached to the side panel to secure the minimum bending radius.



#### Hooks on the connector parts

A connector can be hooked on the reel by hooks on the connector parts on both sides.

RGT310.RM Series

Dimension	Flange Dim.	Reel Width	Core Dim.
310(W)×367(H)×230(D)	310	132	170

(mm)

• 61% lighter than R300-S

RGT380.RM Series

Dimension	Flange Dim.	Reel Width	Core Dim.
380(W)×491(H)×291(D)	380	182	236

(mm)

• 42% lighter than R380-S

#### Key Features

- Fiberglass flanges for excellent durability.
- Selections of auxiliary spool or latching door.
- Auxiliary spool for storing and safety transporting cables.
- Equipped with locking brake screw.